




SOLAR ENERGY INTEGRATION

Thanks to the dedicated solar mixing valve, the NEXT EVO X OUTDOOR can work with a solar system. A clean and eco-friendly solution to avoid waste and increase energy saving.

REMOTE CONTROL



Through the dedicated remote control is possible to manage NEXT EVO X OUTDOOR from each room of the house and activate the ECO function to decrease energy consumptions.

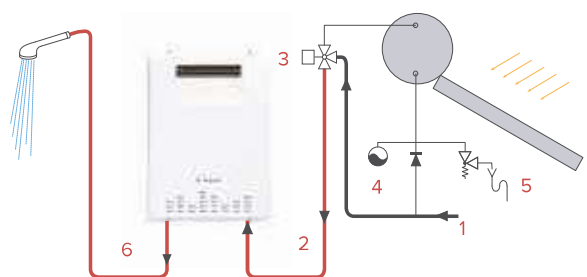

- 1 Inlet cold water
- 2 Pre-heated water
- 3 Thermostatic valve

- 4 Expansion vessel
- 5 Relief valve
- 6 Outlet hot water

NEXT EVO X OUTDOOR

NEW



ANTI-FREEZING

ENERGY
EFFICIENTELECTRONIC
TEMPERATURE
MANAGEMENTOUTDOOR
INSTALLATIONSOLAR
INTEGRATION

/ Low NOx: compliant with ErP 26/09/2018

/ Temperature control by NTC probes at the inlet and outlet of the exchanger

/ Electronic ignition flame ionization

/ Modulation ratio up to 1:5

/ No need of flue gas exhaust pipes

/ Remote control (standard equipment)

/ Operation with water pressure 0.1 bar

/ Operation even with minimum flow rates of water up to 2,5 l / min

/ Standard anti-freeze mode: down to -20°C

/ IPX5 electrical protection


/ A3 type outdoor installation

ENERGY CLASS



DATI TECNICI

		11*	16*	22	26
Gas Category		112H3B/P	112H3B/P	112H3B/P	112H3B/P
Type		A3	A3	A3	A3
NOx emissions	mg/kWh	30	42	47	46
Maximum heat input	kW	22	30	44	52
Minimum heat input	kW	7,8	8,9	8,5	9,5
Maximum heat output	kW	19,2	26,9	38,3	45,2
Minimum heat output	kW	6,8	7,5	7,6	8,6
Maximum nominal pressure	bar	10	10	10	10
Minimum operating pressure	bar	0,1	0,1	0,1	0,1
Minimum operating flow rate	l/min	2,5	2,5	2,5	2,5
Flow rate with heat difference (Δt) 25 °C	l/min	11	16	22	26
Power supply voltage (Freq. 50 Hz)	V	230	230	230	230
Max. absorbed power	W	33	44	40	50
Sound power	dB	58	63	61	63
Protection rating	IPX	5	5	5	5
Minimum working ambient temperature	°C	-20	-20	-20	-20
Overall dimension (HxWxD)	mm	544x374x171	544x374x171	571x394x166	571x394x166
Weight	kg	13	15	18,5	18,5

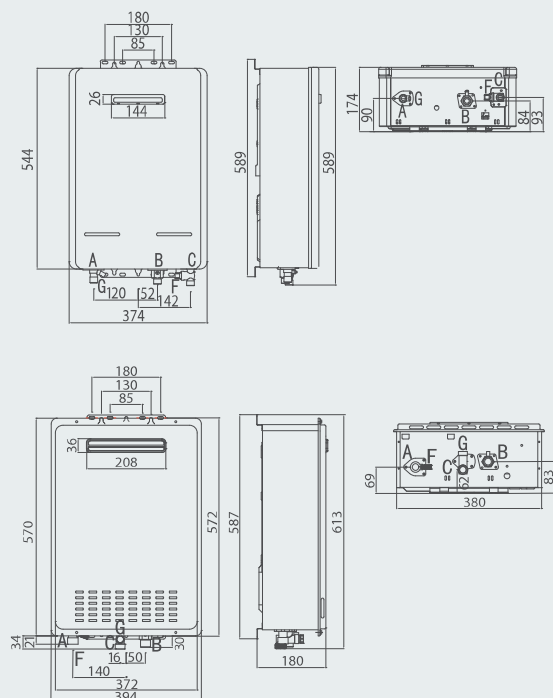

- A.** 1/2" domestic hot water outlet
B. 1/2" gas inlet
C. 1/2" cold water inlet
F. Safety valve discharge
G. Drain valve

NEXT EVO X OUTDOOR



	11 EU*	16 EU*	22 EU	26 EU
Classe energetica	A	A	A	A
Profilo di prelievo	M	XL	XXL	XXL
Modello NG	3632457	3632459	3632461	3632462
Modello GPL	3632458	3632460	kit optional	kit optional

Gas Transformation kit

TRANSFORMATION LPG TO NG 11 LNX	3632501
TRANSFORMATION NG TO LPG 11 LN LNX	3632502
TRANSFORMATION LPG TO NG 16 LNX	3632503
TRANSFORMATION NG TO LPG 16 LNX	3632504
TRANSFORMATION NG TO LPG 22-26 LNX	3632507