


Series 8, Gas hob, 90 cm, Tempered glass, Black PRS9A6H40

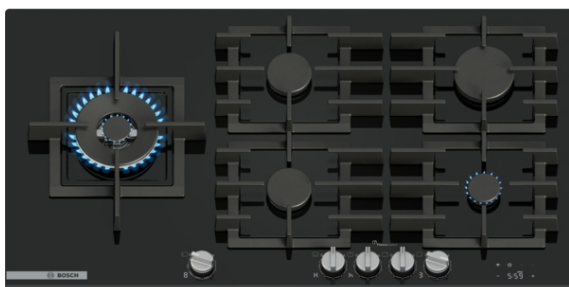

- **Easy cleaning:** detachable knobs and dishwasher-suitable pan supports make cleaning a breeze.
- **Dishwasher-suitable pan supports:** make cleaning your hob even easier.
- **Smart Hood Automatic:** a matching hood automatically adjusts on your hob settings while cooking.
- **Touch control:** manage your cooking time and hood functions effortlessly, all in one place.
- **Semi-continuous pan supports:** smaller for easy cleaning, yet providing a seamless cooking surface.

Technical Data

Product name/family : gas hob w integrated controls

Built-in / Free-standing : Built-in

Energy input : Gas

Total number of positions that can be used at the same time : 5

Required niche size for installation (HxWxD) : 45 x 850-850 x 490-500 mm

Width of the appliance : 915 mm

Dimensions : 45x915x520 mm

Dimensions of the packed product (HxWxD) : 170x1110x660 mm

Net weight : 23.4 kg

Gross weight : 26.8 kg

Residual heat indicator : yes

Location of control panel : Front

Basic surface material : Tempered glass

Color of surface : Black

Color of frame : Black

Length electrical supply cord : 100 cm

Knob Material : Full metal

Sealed Burners : No

Power of 2nd heating element (kW) : 5000 W

Power of 4th heating element (kW) : 1750.00 W

Power of 5th heating element (kW) : 3000 W

Connection Rating : 2 W

Gas connection rating : 12500 W

Fuse protection : 3 A

Voltage : 220-240 V

Frequency : 50; 60 Hz

Energy input : Gas

Gas type preset : Nat gas H/E/(L) 20 (25) mbar

Certified gas types : Liquid gas G30,31 28-30/37mbar

Plug type : No plug (electrical connection by electrician)

Appliance Dimensions (h x w x d) (in) : x x

Dimensions of the packed product : 6.69 x 25.98 x 43.70

Net weight : 52.000 lbs

Gross weight : 59.000 lbs



4 242005 437825

Series 8, Gas hob, 90 cm, Tempered glass, Black PRS9A6H40

Design

- Tempered glass hob surface, black
- Cast iron continuous separable pan supports

Usage convenience

- FlameSelect: precisely adjust the flame in nine defined and repeatable levels.
- Digital display: see the selected power level and the residual heat.
- Sword control knobs, front: easily access knobs in front with strong grip for effortless turning.
- 1 Hand ignition: just push and turn the knob to ignite the flame.

Burners and power

- 5 Gas burners
- Including Dual wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 5 KW (depending on gas type)
- Center front: Standard burner up to 1.75 KW (depending on gas type)
- Center rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: Rapid burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)


Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 5-fold residual heat indicator: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Preset for natural gas (20mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included.
Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 12.5 KW

**Series 8, Gas hob, 90 cm, Tempered glass,
Black
PRS9A6H40**

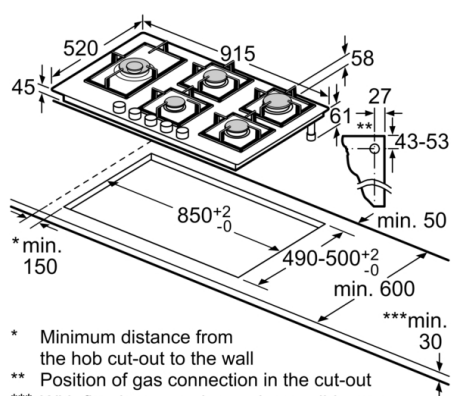

- * Minimum distance from the hob cut-out to the wall
 - ** Position of gas connection in the cut-out
 - *** With fitted oven underneath, possibly more; see space requirements for the oven
- measurements in mm